



Smart Towel Warmer Installation Instructions


Applicable models

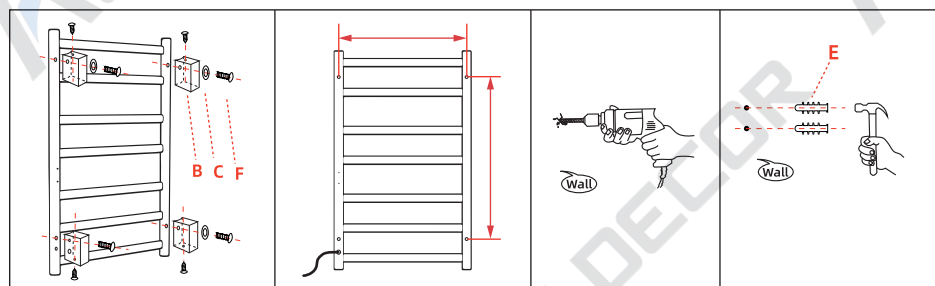

Method: Plug-in


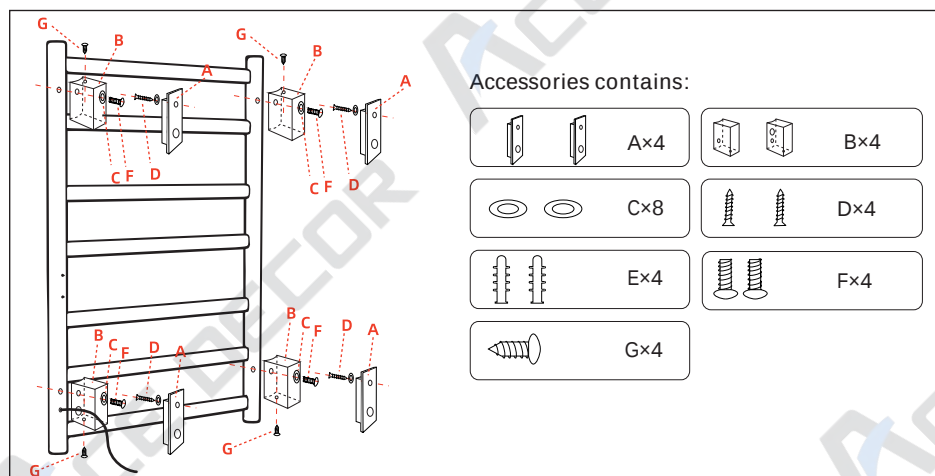


1. Push the bracket that has been fixed on the power cord until it is against the back of the towel rack
(Do not pull the power cord outwards, but push the bracket inwards along the cord. Pulling it outwards with force may break the power cord);
2. Use the M6 cross screw [F] through the flat washer [C] to fix the square mounting bracket [B] to the back of the towel rack
(Please use a manual screwdriver when installing, as electric screwdrivers can easily damage the screws);
3. Measure the vertical distance of the towel rack screw hole and mark it on the wall;
4. Drill 8mm holes at each marked point in the wall, drive the plastic expansion tube [E] into the wall with a hammer;

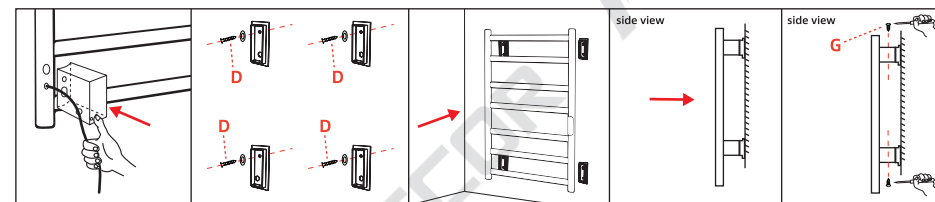


5. Fix the square mounting base [A] to the wall with the pointed screws [D] through the small holes on the base;
6. As shown in the side view, place the towel rack on the square mounting base [A] on the wall, and use M4 self-tapping screws [G] to fix the towel rack body to the square mounting base [A] from both sides. Do not install it upside down; installation is complete.



Method: Hardwired

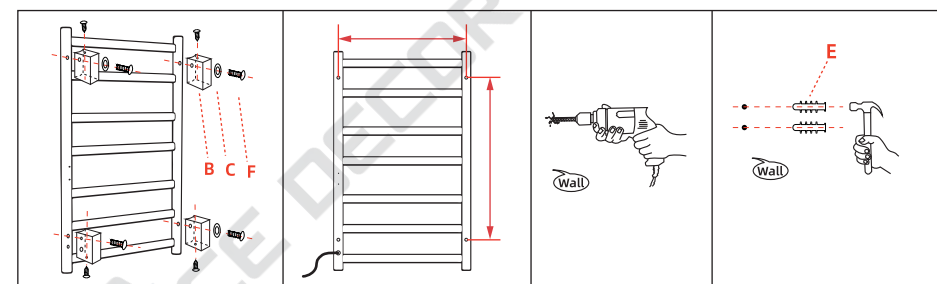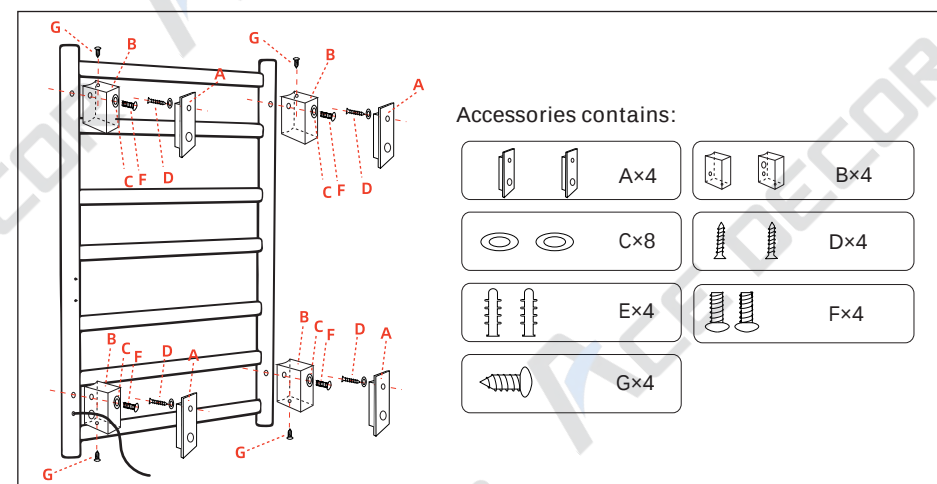


1. Use the M6 cross screw [F] through the flat washer [C] to fix the square mounting bracket [B] to the back of the towel rack
(Please use a manual screwdriver when installing, as electric screwdrivers can easily damage the screws);
2. Measure the vertical distance of the towel rack screw hole and mark it on the wall;
3. Drill 8mm holes at each marked point in the wall, drive the plastic expansion tube [E] into the wall with a hammer;

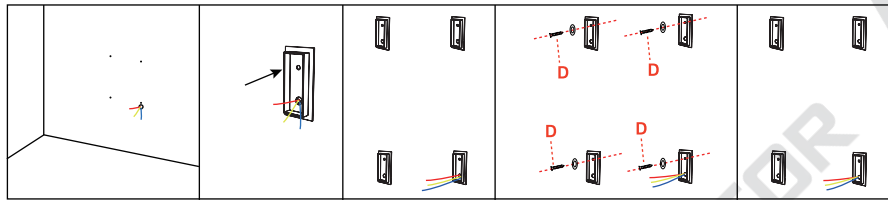

4. Align the small hole of one of the square mounting base [A] with the plastic expansion tube above the wall and fix it with pointed screws [D], pass all the reserved wires through the large hole on the other base, and use pointed screws [D] to pass through the small holes on the base and fix the square mounting base [A] on the wall;

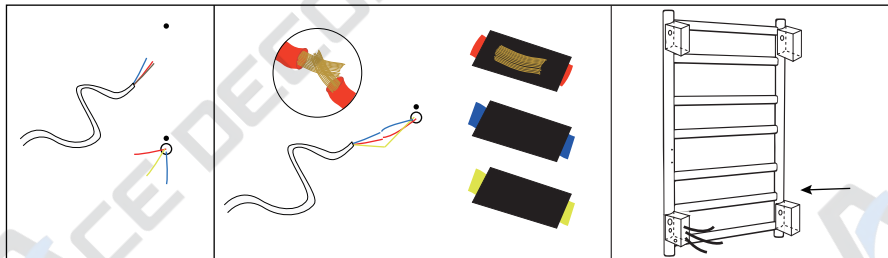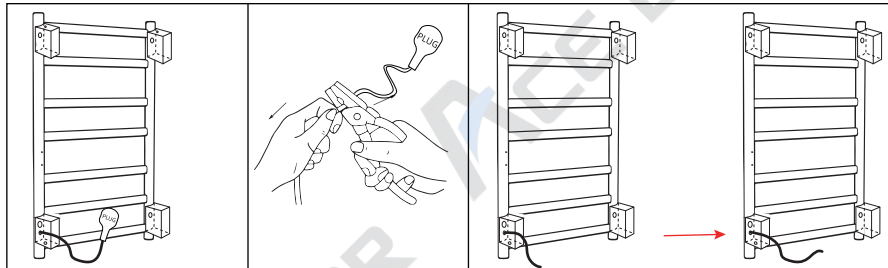

5. Use a vise to cut off the plug part, exit the remaining wire from the small hole, and pull it out from the large opening of the square mounting base and then use a vise to gently cut off the outer rubber skin of the towel rack wire and the outer rubber skin of the three reserved wires on the wall;
 6. Cut off the rubberized skin on the outer layer of the wire to expose the metal wires
 7. According to the live wire to live wire, neutral wire to neutral wire, ground wire to ground wire, perform one-to-one correct wiring;
 8. Wrap the three correctly connected wires with black insulating tape and hide the three wires in the square mounting bracket [B] under the towel rack;

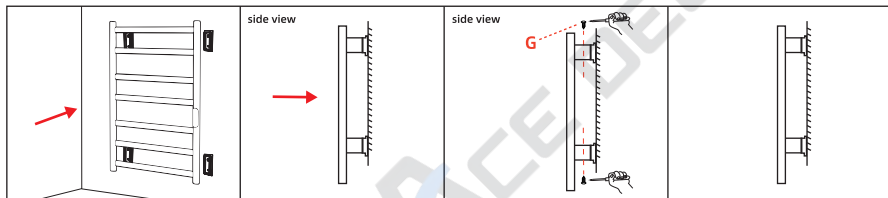

9. As shown in the side view, place the towel rack on the square mounting base [A] on the wall, and use M4 self-tapping screws [G] to fix the towel rack body to the square mounting base [A] from both sides. Do not install it upside down; installation is complete.

Touch Digital Display



← Temperature display (Celsius)

← Timer Setting Button:
1-9H (Countdown Mode)

← Temperature Setting Button: 30-70°C

← Click to open/close



← Temperature display (Fahrenheit)

← Timer Setting Button:
1-9H (Countdown Mode)

← Temperature Setting Button: 30-70°C

← Click to open/close

If you want to heat for a long time, please set the timer to 0 hours, but the maximum heating time is 24 hours, and it will automatically shut down after 24 hours.
 The next time you turn it on, the default setting will be 0h (heating for 24 hours).